BUSTER+PUNCH LONDON

[product. **BUSTER BULB /** TUBE

[range. LIGHTING.]	
[type. E27 SCREW.]	
[type. LED BULB.]	
[region. EUROPE.]	

Buster Tube / Tube is the next generation of our iconic Buster Bulb range. Designed as a sculptural centrepiece with an elegant extended light pipe. This LED bulb combines a functional spotlight with a warm, chrisp light reminiscent of ambient candle light. The Bulb fits any E27 screw light fitting.











[type. 2W DIMMABLE.]

[info. MEASUREMENTS.]

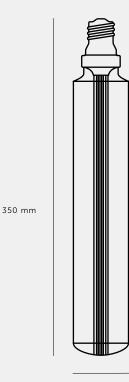

55 mm



[info. SPECIFICATIONS.]

Power: 2W Type: Dimmable LED Screw fitting: E27 Supply: 220-240 VAC Current: 20mA Frequency: 50/60Hz Expected Life: 35000 hrs Weight: 230g

Lumen: Max 100 Light appearance: 2600k (Warm White)

CRI: 80 Power factor: 0.8 Recommended dimmer module: Buster + Punch LED module. (Sold with our dimmer switches)

Please note: Not suitable for DALI dimming systems. CE certified.*

For indoor use only.

*Official data doc can be supplied upon request.

[please. NOTE.]

The dimmable LED Buster Bulb requires a LED-compatible dimmer switch, like the Buster + Punch Premium dimmer switch. They can also be used with on/ off switches.

If you are looking to use this product in conjunction with a smart or home automation system, please refer to the system manufactures guidance to check compatibility. Our bulbs are mains dimmable via phase cut / trailing edge dimming. To avoid disappointment, please ensure a compatible smart module is fitted before purchase.

[info. FINISH & SKU NUMBERS.] [finish.] [sku.] Crystal BB-TU28-E27-D-CR-C

[info. CARE INSTRUCTIONS.]


Wipe with damp cloth with no loose hairs, avoid using any chemicals. Please note all finishes are prone to aging.

[type. 2W NON-DIMMABLE.]

[info. MEASUREMENTS.]



55 mm



[info. SPECIFICATIONS.]

Power: 2W Type: Non-dimmable LED Screw fitting: E27 Supply: 100-240 VAC Frequency: 50/60Hz Current: 20mA Expected Life*: 35,000 hrs Weight: 220g

Lumen: Max 160 Light appearance: 2700k (Warm White)

CRI: 80 Power factor: 0.5 CE certified.*

For indoor use only.

*Official data doc can be supplied upon request.

[please. NOTE.]

The non-dimmable LED Buster Bulb requires a LED-compatible dimmer switch, like the Buster + Punch Premium dimmer switch. They can also be used with on/off switches.

If you are looking to use this product in conjunction with a smart or home automation system, please refer to the system manufactures guidance to check compatibility. Our bulbs are mains dimmable via phase cut / trailing edge dimming. To avoid disappointment, please ensure a compatible smart module is fitted before purchase.

*This product is specifically designed and developed for domestic use in normal conditions and operation only. The lifetime mentioned on the packaging is an average only. This product comes with 2 years warrantee.

[info. FINISH & SKU NUMBERS.]	
[finish.]	[sku.]
Crystal	BB-TU28-E27-ND-CR-B

[info. CARE INSTRUCTIONS.]

Wipe with damp cloth with no loose hairs, avoid using any chemicals. Please note all finishes are prone to aging.